




PRODUCT SPECIFICATION - GALVANISED STORMWATER PIT STEP IRONS

PRODUCT OVERVIEW

Galvanised step rungs for climbing into drainage pits. They give safe stepped access into stormwater and OSD (On-Site Detention) pits and tanks. Two galvanised variants are available, a brick-in step (200 mm x 265 mm) and a bolt-on step (230 mm x 230 mm) fitted with 12 mm Dynabolts. Both are hot dip galvanised for corrosion resistance and stay low-maintenance in wet drainage conditions. Suits: stormwater pits and OSD tanks that need worker access for inspection and cleaning.

Product Type	Galvanised stormwater / OSD pit step irons
Variants	Galvanised brick-in, galvanised bolt-on
Material / Finish	Hot dip galvanised steel (rust-resistant, for outdoors)
Brick-In Step Size	200 mm wide x 265 mm long
Bolt-On Step Size	230 mm wide x 230 mm deep
Fixing	Brick-in, or bolt-on with 12 mm Dynabolts (12 x 60 mm galvanised optional)
Application	Stormwater pits, OSD tanks

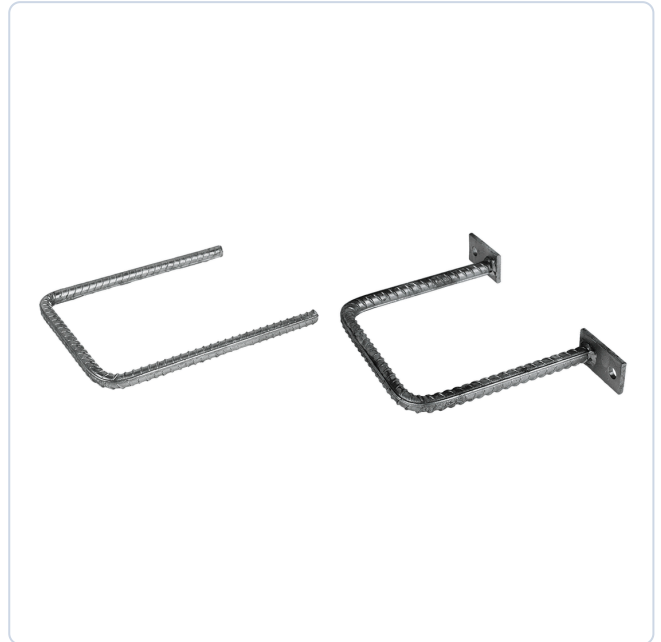

FEATURES & BENEFITS

FEATURE	BENEFIT
Two galvanised variants	A brick-in step and a bolt-on step for different pit builds.
Galvanised for corrosion	Hot dip galvanised steel resists corrosion for long-lasting performance in wet, harsh conditions.
Bolt-on with Dynabolts	The bolt-on step fixes with 12 mm Dynabolts, optionally supplied with 12 x 60 mm galvanised Dynabolts.
Brick-in option	The brick-in step builds straight into the pit wall as it is laid.
Safe stepped access	Rungs give stable footing for inspection and cleaning of the pit.
Built for OSD tanks	Designed for OSD (On-Site Detention) tanks and general stormwater pit access.

MATERIAL - HOT DIP GALVANISED STEEL

Both steps are hot dip galvanised steel for corrosion resistance in aggressive drainage environments. Galvanised in molten zinc, they stay low-maintenance in wet stormwater and OSD conditions.

DURABILITY - CORROSION RESISTANT ACCESS

Built for frequent use and safe, stable access for inspections and maintenance. Both galvanised variants deliver low-maintenance, corrosion-resistant performance in wet stormwater and OSD conditions.

Brick-In	Galvanised	Bolt-On	Galvanised	Brick-In	200 x 265 mm	Bolt-On	230 x 230 mm
----------	------------	---------	------------	----------	--------------	---------	--------------

Galvanised step irons for stormwater and OSD pit access, brick-in or bolt-on.

Hot dip galvanised, corrosion resistant and low maintenance, fixed by brick-in or 12 mm Dynabolts.